




Product Code: WA4135

Description: 1 Gang 35mm Deep FlameGuard® Dry Lining Box

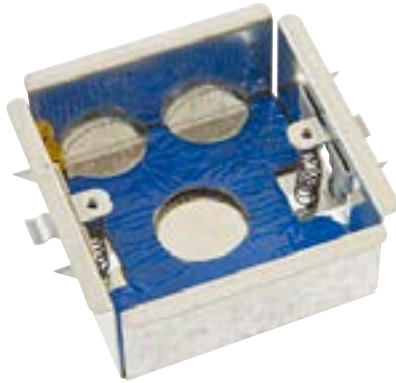

General Information

Dimensions (mm)	82 (W) x 82 (H) x 35 (D)	
Cutout Dimensions (mm)	73 (W) x 73 (H)	
Materials	Body: Galvanised Steel	Earth Terminal: Brass
	Terminal Screw: Brass	Springs: Spring Steel
	Pad Insert: Intumescent Composite	
Minimum Plasterboard Thickness (mm)	5	
Maximum Plasterboard Thickness (mm)	18	
Back Box Knockouts - Total (mm)	1 x Ø25, 4 x Ø25 (Edge)	
Back Box Knockouts - Top (mm)	2 x Ø25 (Edge)	
Back Box Knockouts - Bottom (mm)	2 x Ø25 (Edge)	
Back Box Earth Terminal Supplied	Yes	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	
Standards	BS 4662	
	BS EN 1364-1	
	BS EN ISO 10140-2	
Back Box Knockouts - Sides (mm)	None	
Back Box Knockouts - Rear (mm)	1 x Ø25	

Regulations

Part B (Fire) Up To 90 Minutes In Non-Loadbearing Studwall
 Part E (Acoustic) & Complies with the requirements published in the Robust Details Part E Handbook

