



Decorative Metal Wiring
Accessories in Assorted
Plate Finishes



Decorative Metal Wiring Accessories in Assorted Plate Finishes

Deco® unique product codes

When ordering any Deco® products, please specify the required finish by following the simple code structure as demonstrated here.

For georgian style cast brass, please replace the 'Plate Style' and 'Product Finish' with GCBR eg. GCBR036BK.

VP

Plate Style

BN

Product Finish

036

Product Number

BK

Insert Colour

Contents

Switches	c5
Back Boxes	c9
Power Socket Outlets	c14
13A Fused Connection Units	c16
Control Switches	c18
Socket & Blank Plates	c22
Telephone & Data Sockets	c24
TV & Satellite	c25
New Media™ Plates	c26
Galvanised Boxes	c27
Dry Lining Boxes	c28

A comprehensive range of decorative metal wiring accessories now available under the single Deco® brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

Deco® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated modules brochure can therefore be used in any combination on Deco® accessories.

Deco® plates are manufactured from stainless steel, georgian style (GCBR) plates are manufactured from cast brass.

All Deco® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

Every Deco® product featured in the pages of this brochure are available in 9 distinctive quality finishes: antique brass*, polished brass, polished chrome, satin chrome*, satin brass*, black nickel, pearl nickel, stainless steel and georgian style cast brass. *UK Design Registration 3015621.

All Deco® products are available with black or white inserts, excluding antique brass and black nickel finishes which are supplied with black insert and gasket only.



Polished Chrome
(CH)



Antique Brass*
(AB)



Satin Chrome*
(SC)



Black Nickel
(BN)



Georgian Style
(GCBR)



Satin Brass*
(SB)



Polished Brass
(BR)



Stainless Steel
(SS)



Pearl Nickel
(PN)




Switches

All Deco® switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated MiniGrid® brochure section.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.



All Deco® switch plates are modular as standard, allowing you to create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Ingot Plate Switches
Dimmer Switches | Toggle Switches

Switches



c5

DECO®



011 (025 intermediate)



012



013



019



105

MINIGRID® Switch modules interchangeable with MiniGrid® modules
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page j18.

Plates Switches - MiniGrid®

- 011** 10AX 1 Gang 2 Way Plate Switch
- 012** 10AX 2 Gang 2 Way Plate Switch
- 013** 10AX 3 Gang 2 Way Plate Switch
- 019** 10AX 4 Gang 2 Way Plate Switch
- 105** 10AX 6 Gang 2 Way Plate Switch

Plates Switches - MiniGrid®

- 025** 10AX 1 Gang Intermediate Plate Switch

Standards: BS EN 60669

Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

CLICK®

sales@scolmore.com | Call: 01827 63454 | Fax: 01827 63362 | scolmore.com



411 (425 intermediate switch)




412



413



414

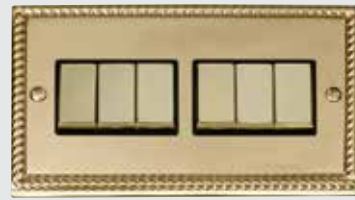

416

MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page j18.

Ingot Plates Switches - MiniGrid®

- 411** 10AX Ingot 1 Gang 2 Way Plate Switch
- 412** 10AX Ingot 2 Gang 2 Way Plate Switch
- 413** 10AX Ingot 3 Gang 2 Way Plate Switch
- 414** 10AX Ingot 4 Gang 2 Way Plate Switch
- 416** 10AX Ingot 6 Gang 2 Way Plate Switch

Ingot Plates Switches - MiniGrid®

- 425** 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669

Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



401



402



403



471



404



406



426



432



472

MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page j18.

Unfurnished Plates - MiniGrid®

- 401** 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- 402** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- 403** 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- 404** 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- 406** 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- 426** 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- 432** 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Please note 432 is not available in BN, BR, PN, SB or GCBR.

Architrave Switch Plates (Unfurnished)

- 471** 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- 472** 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the dedicated architrave back boxes WA571 / WA572 and can only be flush mounted. See page c27.

Back Box Depth: Dependant on modules used **Cable Size:** Dependant on modules used

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm),

Single architrave: (35mm x 88mm x 8mm), **Twin architrave:** (35mm x 150mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



512



518



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. GR100 yokes are required to mount the MiniGrid® modules into prior to assembling the frontplate.

MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page j18.

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures


3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures

Back Box Depth: 47mm Minimum **Cable Size:** Dependant on module used
Dimensions: **12 Module:** (146mm x 146mm x 8mm) **18 Module:** (146mm x 227mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

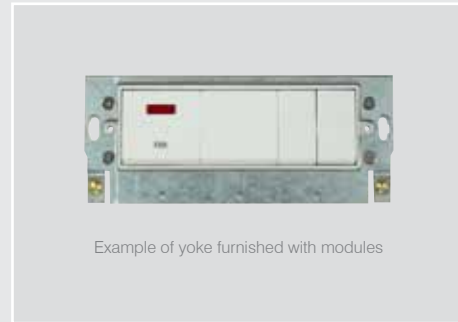

Example of yoke furnished with modules



GR100



WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black

GR100PW MiniGrid® Module Yoke - 6 Apertures - White

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box

WA518 3 Tier 47mm Deep K.O. Box

Cutout Sizes: **WA512:** 137mm x 137mm **WA518:** 137mm x 197mm



140



152



153



154



Interchangeable modules available on page j36

Dimmer Switches

- 140** 1 Gang 2 Way 400Va Dimmer Switch
- 152** 2 Gang 2 Way 400Va Dimmer Switch
- 153** 3 Gang 2 Way 400Va Dimmer Switch
- 154** 4 Gang 2 Way 400Va Dimmer Switch

We recommend the use of branded halogen lamps with all Deco® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Standards: BS EN 60669, BS EN 55015 Type: Leading Edge

Back Box Depth: 25mm Cable Size: 2 x 1.5mm²

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



140PL



152PL



SP900



MD9001



153PL



154PL



185



186

PL plates only available in Satin Chrome & Polished Chrome
 The dimmer modules are supplied separately to the plates.

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Dimmer Module (25 x 62mm)
- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 1 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 2 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 2 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 2 Gang Dimmer Plate & Knob (630W or 1000W) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Maximum Wattage: **185:** 1000W, **186:** 1630W

Back Box Depth: Dependant on modules fitted Cable Size: 2 x 1.5mm²

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



421



MD9125



422



423



424

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) toggle switch module.

Toggle Switches

- 421** 10AX 1 Gang 2 Way Toggle Switch
- 422** 10AX 2 Gang 2 Way Toggle Switch
- 423** 10AX 3 Gang 2 Way Toggle Switch
- 424** 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125AB** Intermediate Toggle Switch Module - Antique Brass
- MD9125BN** Intermediate Toggle Switch Module - Black Nickel
- MD9125BR** Intermediate Toggle Switch Module - Polished Brass
- MD9125CH** Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN** Intermediate Toggle Switch Module - Pearl Nickel

Not interchangeable with dimmers or other MiniGrid® modules.

Standards: BS EN 60669

Back Box Depth: 25mm Minimum **Cable Size:** 2 x 2.5mm² / 4 x 1.5mm²

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 9 different Deco® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

13A Wall Socket Outlets | Round Pin
 Fused Connection Units | Wall Socket Outlets
 Fan Isolation Switches | DP Switches





038



039



535



036



536



036

Round Pin Socket Outlets

- 038** 5A Round Pin Socket
039 2A Round Pin Socket

Switched Socket Outlets

- 035** 13A 1 Gang DP Switched Socket
036 13A 2 Gang DP Switched Socket

Ingot Switched Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket
536 13A Ingot 2 Gang DP Switched Socket

Standards: 038,039: BS 546 035,036, 535,536: BS 1363

Back Box Depth: 25mm Minimum **Cable Size:** **2A:** 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm² **13A:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



771



770



571



570

Switched Socket Outlets With USB

- 771** 13A 1 Gang Switched Socket With 2.1A USB Outlet
770 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Ingot Switched Sockets With USB Outlet

- 571** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet
570 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)

Standards: BS1363, BS5733, BS60950-1, EN61000-6-1, EN 61000-6-3

Back Box Depth: 25mm, 571: 35mm **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



Fused Connection Units With Optional Flex Outlet

- 050** 13A Fused Connection Unit
- 051** 13A DP Switched Fused Connection Unit
- 052** 13A DP Switched Fused Connection Unit With Neon
- 053** 13A Fused Connection Unit With Neon

Fused Connection Units Without Flex Outlet

- 650** 13A Fused Connection Unit
- 651** 13A DP Switched Fused Connection Unit
- 652** 13A DP Switched Fused Connection Unit With Neon
- 653** 13A Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



Ingot Fused Connection Units With Optional Flex Outlet

- 550** 13A Ingot Fused Connection Unit
- 551** 13A Ingot DP Switched Fused Connection Unit
- 552** 13A Ingot DP Switched Fused Connection Unit With Neon
- 553** 13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

- 750** 13A Ingot Fused Connection Unit
- 751** 13A Ingot DP Switched Fused Connection Unit
- 752** 13A Ingot DP Switched Fused Connection Unit With Neon
- 753** 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



022



023



522



523



623



722



622



020



520



723

20A Control Switches With Optional Flex Outlet

- 022** 20A DP Switch
- 023** 20A DP Switch With Neon

20A Control Switches Without Flex Outlet

- 622** 20A DP Switch
 - 623** 20A DP Switch With Neon
- 3 pole and 20A DP switches are non-modular

Fan Isolation Switch

- 020** 10A 3 Pole Fan Isolation Switch
- This product is not modular

Standards: BS EN 60669

Back Box Depth: 25mm Minimum **Cable Size:** **20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

Ingot Fan Isolation Switch

- 520** 10A Ingot 3 Pole Fan Isolation Plate Switch
- This product is not modular

Ingot 20A Control Switches With Optional Flex Outlet

- 522** 20A Ingot DP Switch
- 523** 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

- 722** 20A Ingot DP Switch
 - 723** 20A Ingot DP Switch With Neon
- 3 pole and 20A DP switches are non-modular

Standards: BS EN 60669

Back Box Depth: 25mm Minimum **Cable Size:** **20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



200



201



202



204



205



203

45A Switches And Socket Outlets

- 200** 45A 1 Gang DP Switch
- 201** 45A 1 Gang DP Switch With Neon
- 202** 45A 2 Gang DP Switch
- 203** 45A 2 Gang DP Switch With Neon
- 204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- 205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177

Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



500



501



502



504



505



503

Ingot 45A Switches And Socket Outlets

- 500** 45A Ingot 1 Gang DP Switch
- 501** 45A Ingot 1 Gang DP Switch With Neon
- 502** 45A Ingot 2 Gang DP Switch
- 503** 45A Ingot 2 Gang DP Switch With Neon
- 504** 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505** 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Only available in selected finishes: CH, SC, AB, BN, PN & SS

Standards: BS EN 60669, BS 4177

Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²

Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



024



060



061



100

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 1998 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 024: BS EN 60669 100: BS EN 61558

Back Box Depth: 024: 25mm min 100: 47mm min. **Cable Size:** 024: 3 x 2.5mm² 100: 2 x 1.5mm² / 1 x 2.5mm²

Dimensions: 1 Gang: (88mm x 88mm x 8mm), 2 Gang: (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,

BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

TV, Telephone & Data Sockets

The following pages contain details of Deco® products designed to deal with handling data and media transfer through telephone, computer, TV or radio. As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.

RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets





115



120 / 125



121 / 126

RJ11 Data Outlet

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master

121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary

126 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum **Termination Type:** IDC
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



156



157 / 170



158



159

Satellite Outlets (Unshielded)

156 Non-Isolated Single Satellite Outlet

157 Isolated Satellite & Isolated Coaxial Outlet

170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-Isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet

066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet

159 Twin Isolated Coaxial Outlet

Back Box Depth: 16mm Minimum
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



310

311

312



MP606



MM410BK



MM405WH



MM501BK



MM440BK

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Unfurnished Plates - New Media™

- 310*** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures
- MP606*** Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures

*Available in Chrome (CH), Satin Chrome (SC) and Polar™ White (PW)
All plates supplied with black and white gaskets where applicable.
†Excludes GCBF Finish


Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

The plate has its own dedicated 47mm deep galvanised steel mounting box (MP525) for flush fitting, featuring segregation walls which is supplied separate to the plate.

Back Box Depth: 310, 311, 312: Dependant on module used **MP606:** 47mm **Cable Size:** MP606: 13A 4 x 2.5mm
Dimensions: 1 Gang: (88mm x 88mm x 8mm), 2 Gang: (146mm x 88mm x 8mm). **MP606:** 250mm x 216mm x 9mm



WA093



SP650



SP675



WA094



WA095



WA571



WA572



WA370



WA375

essentials™

For the complete range of back boxes see Essentials™ page m4.

Galvanised Steel Back Boxes

- WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA370** 1 + 1 35mm Deep Dual Accessory Box (Deco™ Range Only)
- WA375** 1 + 2 35mm Deep Dual Accessory Box (Deco™ Range Only)
- WA571** 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco™ Range Only)
- WA572** 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco™ Range Only)

Longer Fixing Screws

- SP650** Standard 3.5mm Dia. 50mm Long Screws (Bag 100)
- SP675** Standard 3.5mm Dia. 75mm Long Screws (Bag 100)

Dimensions: **WA571:** 85mm x 30mm x 25mm **WA572:** 145mm x 30mm x 25mm


Understanding the code:
Screws available in **BR** Brass, **CH** Chrome and **BN** Black Nickel finishes.
Suffix code with preferred finish.




WA106P



GA100



WA107P



WA4135



WA4247

essentials™

For the complete range of back boxes see Essentials™ page m5.

Dry Lining Boxes

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes

- GA100** 'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1363-1: 1999 & BS EN 1364-1: 1999 Acoustic: BS EN ISO 140-3: 1995 & BS EN ISO 717-1: 1997. Complies with Building Regulations
Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.