



Guaina metallica Pliable conduit

Ricoperta in EVA aspirato 6071E Coated in vacuum EVA 6071E

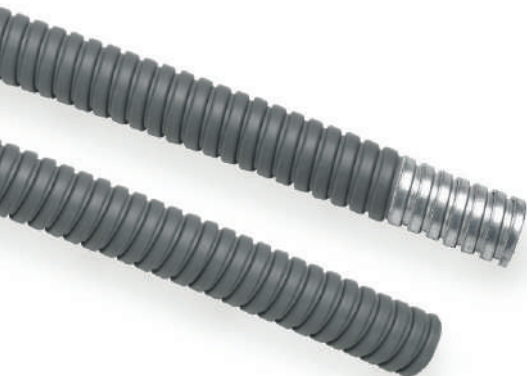


Tubi pieghevoli in nastro di acciaio zincato Sendzimir (UNI EN 10346).
Il rivestimento è realizzato in EVA aspirato, termoplastico non propagante la fiamma, a bassa emissione di gas tossici e corrosivi, privo di alogeni.
Resistenti ai più comuni oli e grassi, presentano ottima flessibilità e buona resistenza meccanica.
Continuità elettrica garantita
Disponibile in Grigio scuro (RAL7043) e Nero a richiesta

Pliable conduits made of Sendzimir galvanized steel (UNI EN 10346).
The coating is made of thermoplastic, flame retardant vacuum EVA, with a low level of toxic and corrosive gas emission, halogen-free.
Resistant to most common oils and greases, they are extremely flexible and have excellent levels of mechanical resistance.
Electrical continuity guaranteed
Available in dark Gray (RAL7043) and Black on request

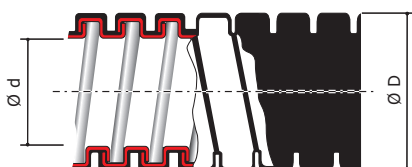

- Standard
CEI EN 61386-1 e 61386-22,
UNI CEI EN 45545-2
- Classificazione CEI EN 61386 3 4 4 1
- Grado IP CEI EN 60529 IP44
IP66/IP68/IP69 con 66BTP
- Resistenza alla compressione
DN10÷DN27 1250 N
DN35÷DN51 750 N
- Resistenza all'urto 6 J
- Resistenza alla trazione
DN10÷DN16 500 N
DN21÷DN51 1000 N
- Resistenza al carico sospeso 450 N
- Emissioni fumi secondo NF F 16-101 F1

- Standard
IEC EN 61386-1 and 61386-22,
UNI IEC EN 45545-2
- Classification IEC EN 61386 3 4 4 1
- IP degree IEC EN 60529 IP44
IP66/IP68/IP69 with 66BTP
- Compressive strength
DN10÷DN27 1250 N
DN35÷DN51 750 N
- Impact resistance 6 J
- Tensile strength
DN10÷DN16 500 N
DN21÷DN51 1000 N
- Resistance to suspended load 450 N
- Fume emissions NF F 16-101 F1



HF
Halogen
FREE

Aggraffatura semplice Simple interlocking



CODICE GRIGIO CODE GRAY	CODICE NERO CODE BLACK a rich./on req.	DIAM. NOMINALE NOMINAL DIAM.	DIAM. INTERNO INTERNAL DIAM. mm	DIAM. ESTERNO EXTERNAL DIAM. mm	RAGGIO CURVA RADIUS CURVE	CONFEZIONE PACKAGE m
6071E-010	6071E-010N*	10	10,0	14,0	30	50
6071E-012	6071E-012N*	12	12,0	16,0	35	50
6071E-015	6071E-015N*	16	15,5	19,5	50	50

*A richiesta/On request

Aggraffatura rinforzata Reinforced interlocking



CODICE GRIGIO CODE GRAY	CODICE NERO CODE BLACK	DIAM. NOMINALE NOMINAL DIAM.	DIAM. INTERNO INTERNAL DIAM. mm	DIAM. ESTERNO EXTERNAL DIAM. mm	RAGGIO CURVA RADIUS CURVE	CONFEZIONE PACKAGE m
6071E-020	6071E-020N*	21	20,5	25,5	65	50
6071E-027	6071E-027N*	27	26,5	31,5	80	25
6071E-035	6071E-035N*	35	35,0	41,0	120	25
6071E-040	6071E-040N*	40	40,0	46,0	150	25
6071E-050	6071E-050N*	51	50,5	56,0	220	25

*A richiesta/On request

CEI EN 61386	
CEI EN 61386	
EN 45545-2 HL3 per R22/R23	

Accessori correlati Related accessories

Per For
IP66/IP68/IP69



66BTP	6014	6014-G	6014XX	6014-P	6015	6115	6024	6025	6117	6117XX
pag.74	pag. 56	pag. 58	pag. 61	pag. 63	pag. 60	pag. 60	pag. 64	pag. 65	pag. 84	pag. 87