

### General Information

Dimensions (mm)	292 (L) x 279 (W) x 68 (D)
Materials	Housing: Polycarbonate; Diffuser: Polycarbonate
Finish	White
Product Weight (Kg)	1.08
Ingress Protection	IP65
Mounting	Wall
Warranty (Years)	4

### Luminaire Output

Colour Temperature (K)	6500
Beam Angle (°)	120
LED Lifetime (L70) (Hours)	50000

### Emergency Backup Information

Emergency Luminous Flux (lm)	368
Battery Specification	3.6V 3000mAh Ni-Cd Battery - Serial
Minimum Duration (Hours)	3

### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50/60
Safety Class	I
Circuit Wattage (W)	6
Operation Mode	Non-maintained Only
Cable Entry	2 x Ø20mm Knockouts
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

### Compatible Accessories

OVEMB3630NCS - 3.6V 3000mAh Ni-Cd Battery - Serial

### Escape Route 1 lux min


Mounting Height	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	3.7	7.3	7.3	7.3	3.7
2.5m	4	8	8	8	4
3.0m	4.4	9	9	9	4.4

Illuminance values based on a maintenance factor of 0.8  
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)

### Open Areas

Mounting Height	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	3.1	7	7	7	3.1
2.5m	3.3	7.5	7.5	7.5	3.3
3.0m	3.6	8.9	8.9	8.9	3.6

Illuminance values based on a maintenance factor of 0.8

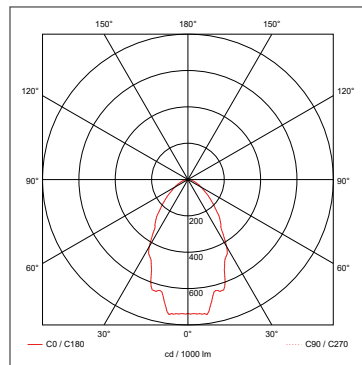

Emergency (DC)

